# TI2006-308 Universal Rescue Hoist Control Cable

The **TI2006-308 Universal Rescue Hoist Control Cable** uses state-of-the-art technology to operate helicopter rescue hoists (42305-1, 42305R1, 42305-3, 42305-5) outside of the aircraft. Repairs and testing can now be done safely and efficiently using power from any Tesla™ Ground Power Unit. Constructed from a rugged combination of advanced composite materials and corrosion-resistant alloys along with hermetically sealed control electronics, the Universal Rescue Hoist Control Cable will withstand the harshest battlefield conditions and other extreme environments while providing reliable switching up to 1500 peak amps.



Power Anytime, Anywhere

#### **Features:**

- Compatible with all Tesla™ GPU's
- Rated to 1500 peak amps
- Clamped cable connection
- UV, fuel, fungus, water, and oil resistant
- · Easy component replacement
- Manufactured by Tesla™
- Exceeds MIL-STD-810F
- Tested to withstand 50 G of force



Tesla™ Industries, Inc.

www.teslaind.com • www.tesla1.com

Email: tesla1@teslaind.com **Headquarters:** (302) 324-8910

101 Centerpoint Blvd. New Castle, DE 19720 Western Regional Office: (775) 622-8801 9475 Double R Blvd. Suite 2, Reno, NV 89521







## **Features and Benefits**

#### State-of-the-Art Control

The Tesla™ Universal Rescue Hoist Control Cable is equipped with a high current switchable control. A hermetically sealed toggle switch, along with a protective switch guard, allows the safe transfer of up to 1500 peak amps — no more arcing or fusing. When active, a status LED illuminates to let the user know power is present (see Figure 1).

#### **Weatherproof Construction**

Through a series of strategically placed seals and bushings, the Tesla™ Universal Rescue Hoist Control Cable is hermetically sealed to lock out rain, snow, sand or any other form of damaging debris.

#### **Internal Cable Connections**

Unlike connectors with cables that are molded directly to the housing, easily crimpable bullets (shown in Figure 4) allow for direct termination inside of the connector. Additionally, compression grommets provide strain relief. This eliminates the possibility of dangerous shocks from exposed wiring due to cable stretching.

#### **Replaceable DC Connector Contacts**

Manufactured from highly conductive alloys, the contacts, (shown in Figure 5) feature threads that are resistant to damage and ideal for superior torquing and surface contact. Once installed, the contacts are hermetically sealed within the connector, yet can be easily replaced "in-the-field" without discarding the entire connector.

#### **Insertion/Extraction Tool**

The Tesla™ Universal Rescue Hoist Control dc plug can be easily repaired by replacing the contacts using the Insertion/Extraction Tool pictured in Figure 6. The tool and replacement contacts can be ordered through Tesla™ Customer Service at (302) 324-8910.



Figure 1: Power at the flip of a switch.



Figure 2: Attaches easily to dc input on helicopter rescue hoist.



Figure 3: Rescue hoist control attached to a Tesla GPU.

## **Components - Exploded View**

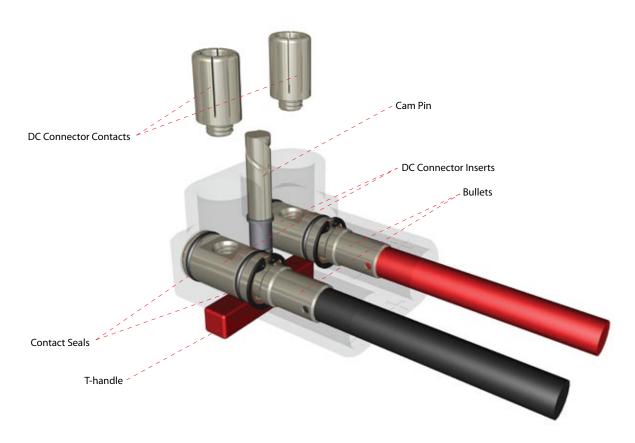


Figure 4: Cable Crimp Bullets: TI2005-199



Figure 5: DC Plug Replacement Contacts: TI2005-490




Figure 6: Insertion/Extraction Tool: TI2005-488






Figure 7: The TI2006-308 Universal Hoist Control Cable is designed to withstand daily military testing.

# **Dimensions and Technical Specifications**

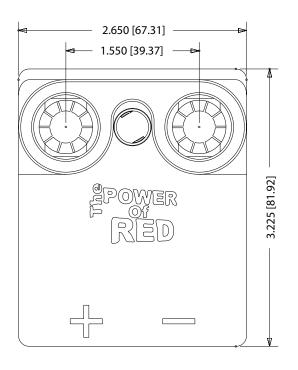

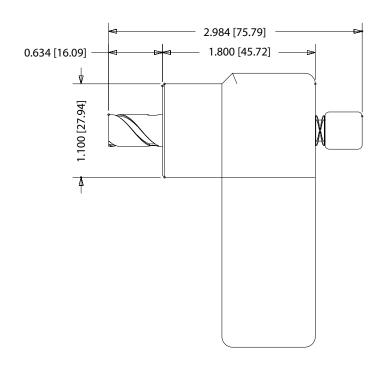

## **Technical Specifications:**

Input Voltage Range	9 - 36 Vdc
Power Consumption (engaged)	72 mA
Power Consumption (disengaged)	O mA
Maximum Current Continuous Current	650 A 1000 cycles 200 A
Status Indicator LED	LED On/Off Indicator
Protection Class	DC Plug - IP28C Enclosure - IP68C
Air Gap-leakage Path	0.55" (14 mm)
Operating Temperature	-25° to 60°C (-32° to 140°F)
Storage Temperature	-40° to 85°C (-40° to 185°F)
Overvoltage Maximum	60 V
Weight (8 ft. cable)	7.5 lbs. (3.4 kg)
Warranty	2 years (3 years optional)

<sup>\*</sup> All dimensions are in inches [millimeters]